


PRO[®] BOUNCE

TECHNICAL DATA SHEET

Area elastic cushioned ProBounce[®] performs better in all conditions.

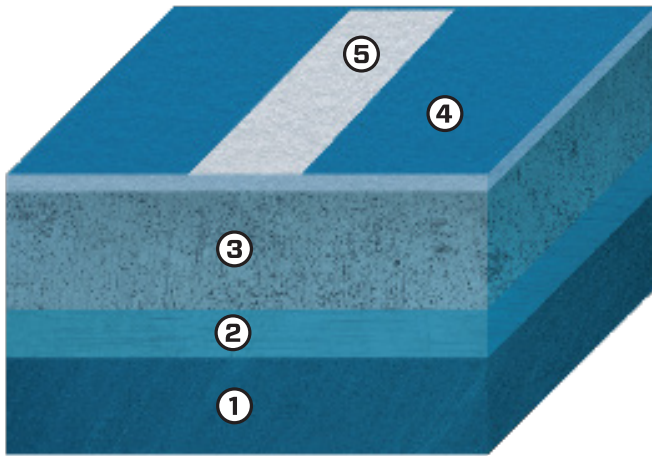

X-Section

- ① Crushed Rock, Post Tension Concrete or Asphalt Base
- ② Moisture-Proof Stable Backing
- ③ Synthetic Fibers and Infill with Polyseal Binder
- ④ Color Finish
- ⑤ Game Lines

Our Patented ProBounce[®] Technology is a long term solution for the tennis court you have always dreamed about.

*Note: Cross Section Not to Scale

PROBOUNCE[®]

CONSTRUCTION	Monolithic Pavement
FIBER REINFORCEMENT	Polypropylene
TOTAL THICKNESS	16 MM
IN-FILL	Poly Resin Bound 40/60 Sand
BACKING SYSTEM	Urethane Laminated: 3 Ply Fabric w/ Polyester
TOTAL WEIGHT	4 LBS / F ²
ROLL LENGTH	120 FT
ROLL WIDTH	12 FT
COLOR FINISH	Flexible Acrylic Color System

Standard Use:

- Cushioned all weather ORT (Overlay Renovation Surface) for use over crushed rock base or asphalt and concrete.
- Restores badly cracked tennis courts.
- Installs in hard to reach areas easily like roof decks, remote islands and mature landscaped properties.

More Details:

- All materials specifications subject to manufacturing tolerances of +/- 5%.

NGISPORTS.COM
info@ngisports.com

Tel: (800) 835-0033
Fax: (423) 499-8882

2807 Walker Road,
Chattanooga, TN 37421



ENGINEERED FOR SPORT